

BARKAS

MAKİNA VE KALIP SAN. TİC. LTD. ŞTİ.

Daima Yeni Nesillere...

BARKAS

MAKİNA VE KALIP SAN. TİC. LTD. ŞTİ.









Daima Yeni Nesillere...

BARKAS

MAKİNA VE KALIP SAN. TİC. LTD. ŞTİ.

BARKAS

MAKİNA VE KALIP SAN. TİC. LTD. ŞTİ.

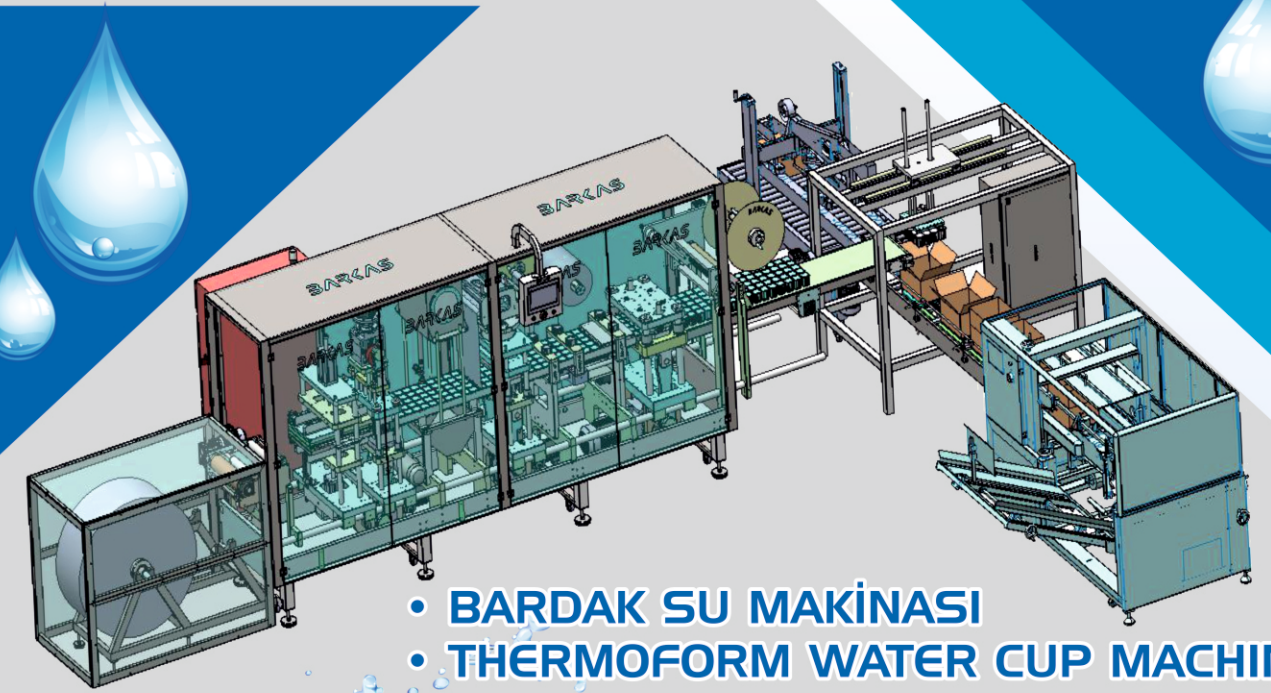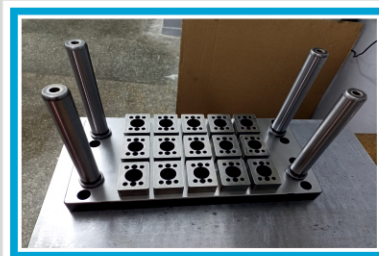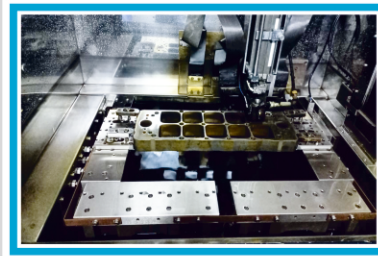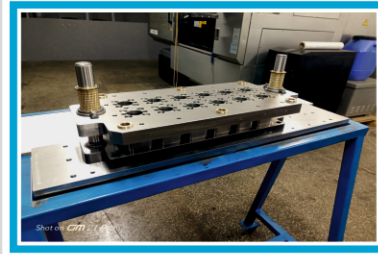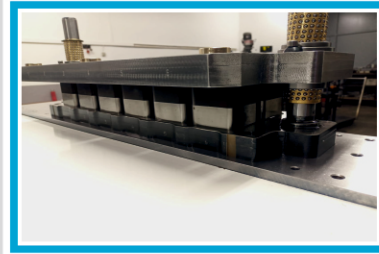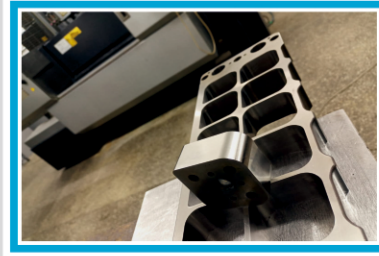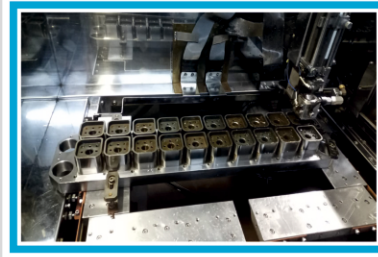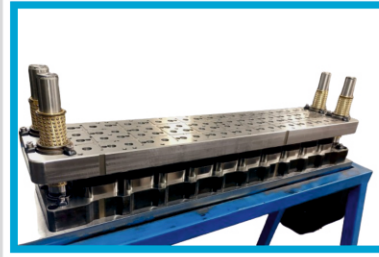

- BARDAK SU MAKİNASI
- THERMOFORM WATER CUP MACHINE



MAKİNA MODELLERİMİZ
OUR MACHINE MODELS

DYN-10 (2x5)
DYN-15 (3x5)
DYN-20 (4x5)
DYN-20 (2x10)

www.barkasmakina.com

www.barkasmakina.com

Gsm: 0544 446 37 53 - 0543 612 12 74 - 0532 407 22 66 - barkasmakinakalip@gmail.com
Maltepe Mah. Fazılpaşa Cad. 4. Zer Sanayi Sit. No:16/7 ZEYTİNBURNU / İSTANBUL



Gsm: 0544 446 37 53 - 0543 612 12 74 - 0532 407 22 66 - barkasmakinakalip@gmail.com
Maltepe Mah. Fazılpaşa Cad. 4. Zer Sanayi Sit. No:16/7 ZEYTİNBURNU / İSTANBUL

FUL OTOMATİK BARDAK SU MAKİNASI

TİP	DYN-10 (2x5)
DOLUM ÜRÜNÜ	180-200 cc kap
KAPASİTE	16.000-17.000 kap/saat
KESME KALIP	Malzeme M390
FOLYO MALZEMESİ	Alt Folyo : PET (500-700 mikron) Üst Folyo : Alüminyum Folyo lake Termolak 40
FOLYO GENİŞLİĞİ	350 mm
KALIP GÖZ SAYISI	2x5
MAKSİMUM KALIP DERİNLİĞİ	80 mm
ELEKTRİK GEREKSİNİMİ	380 V, 3 Faz, 50 Hz
BASINÇLI HAVA GEREKSİNİMİ	6 bar Maks. 9.000 lt/dakika
SOĞUTMA SUYU GEREKSİNİMİ	12-16 C Mineralden rafine edilmiş, doğal pH Su sertliği 11 Sabitleme r ½" 8.000 lt/saat 12.000 kcal/h
MAKİNA AĞIRLIĞI	Max 5000- kg.
ELEKTRİK TÜKETİMİ	Max 54 Kw/h (Ortalama olarak 27 Kw/h)
BOBİN ÇAPLARI	ALT - Ø900 mm ÜST - Ø300 mm
BOBİN GÖBEK ÇAPI	Alt Ø76 mm Üst Ø150 mm
MAKİNA ÖLÇÜLERİ	6000x11400x2600 mm
MAKİNADA KULLANILAN MALZEMELER	Genel olarak paslanmaz çelik, alüminyum,bronz ve çelikler krom kaplıdır.

FULL AUTOMATIC WATER PACKING MACHINE

TYPE	DYN-10 (2x5)
FILLING PRODUCT	180-200 ml cup water
CAPACITY	16.000-17.000 cup/hour
MOULD	Material M390
FILM MATERIAL	Base Film : PET (500-700 micron) Cover Film : Alu foil lacquered Thermolak 40
FOIL WIDTH	350 mm
MOULD MEDICINE	2x5
MAXIMUM MOULD DEPTH	80 mm
ELECTRICAL REQUIREMENT	380 V, 3 Phase, 50 Hz
PRESSURIZED AIR REQUIREMENT	6 bar Max. 9.000 lt/min.
CHILLED WATER REQUIREMENT	12-16 C refined from minerals, Neutral pH, water hardness 11 fixing r ½" 8.000 lt/hour 12.000 kcal/h
WEIGHT OF MACHINE	Max 5000- kg.
ELECTRICAL CONSUMPTION	Max 54 Kw/h (on an average 27 Kw/h)
FILM REEL DIAMETER	Lower - 900 mm Upper - 300 mm
REEL CORE DIAMETER	Lower Ø76 mm Upper Ø150 mm
MACHINE DIMENSIONS	6000x11400x2600 mm
MATERIALS USED IN THE MACHINE	In general stainless steel, alüminyum,bronz an steel with higher ration of chrome nickel

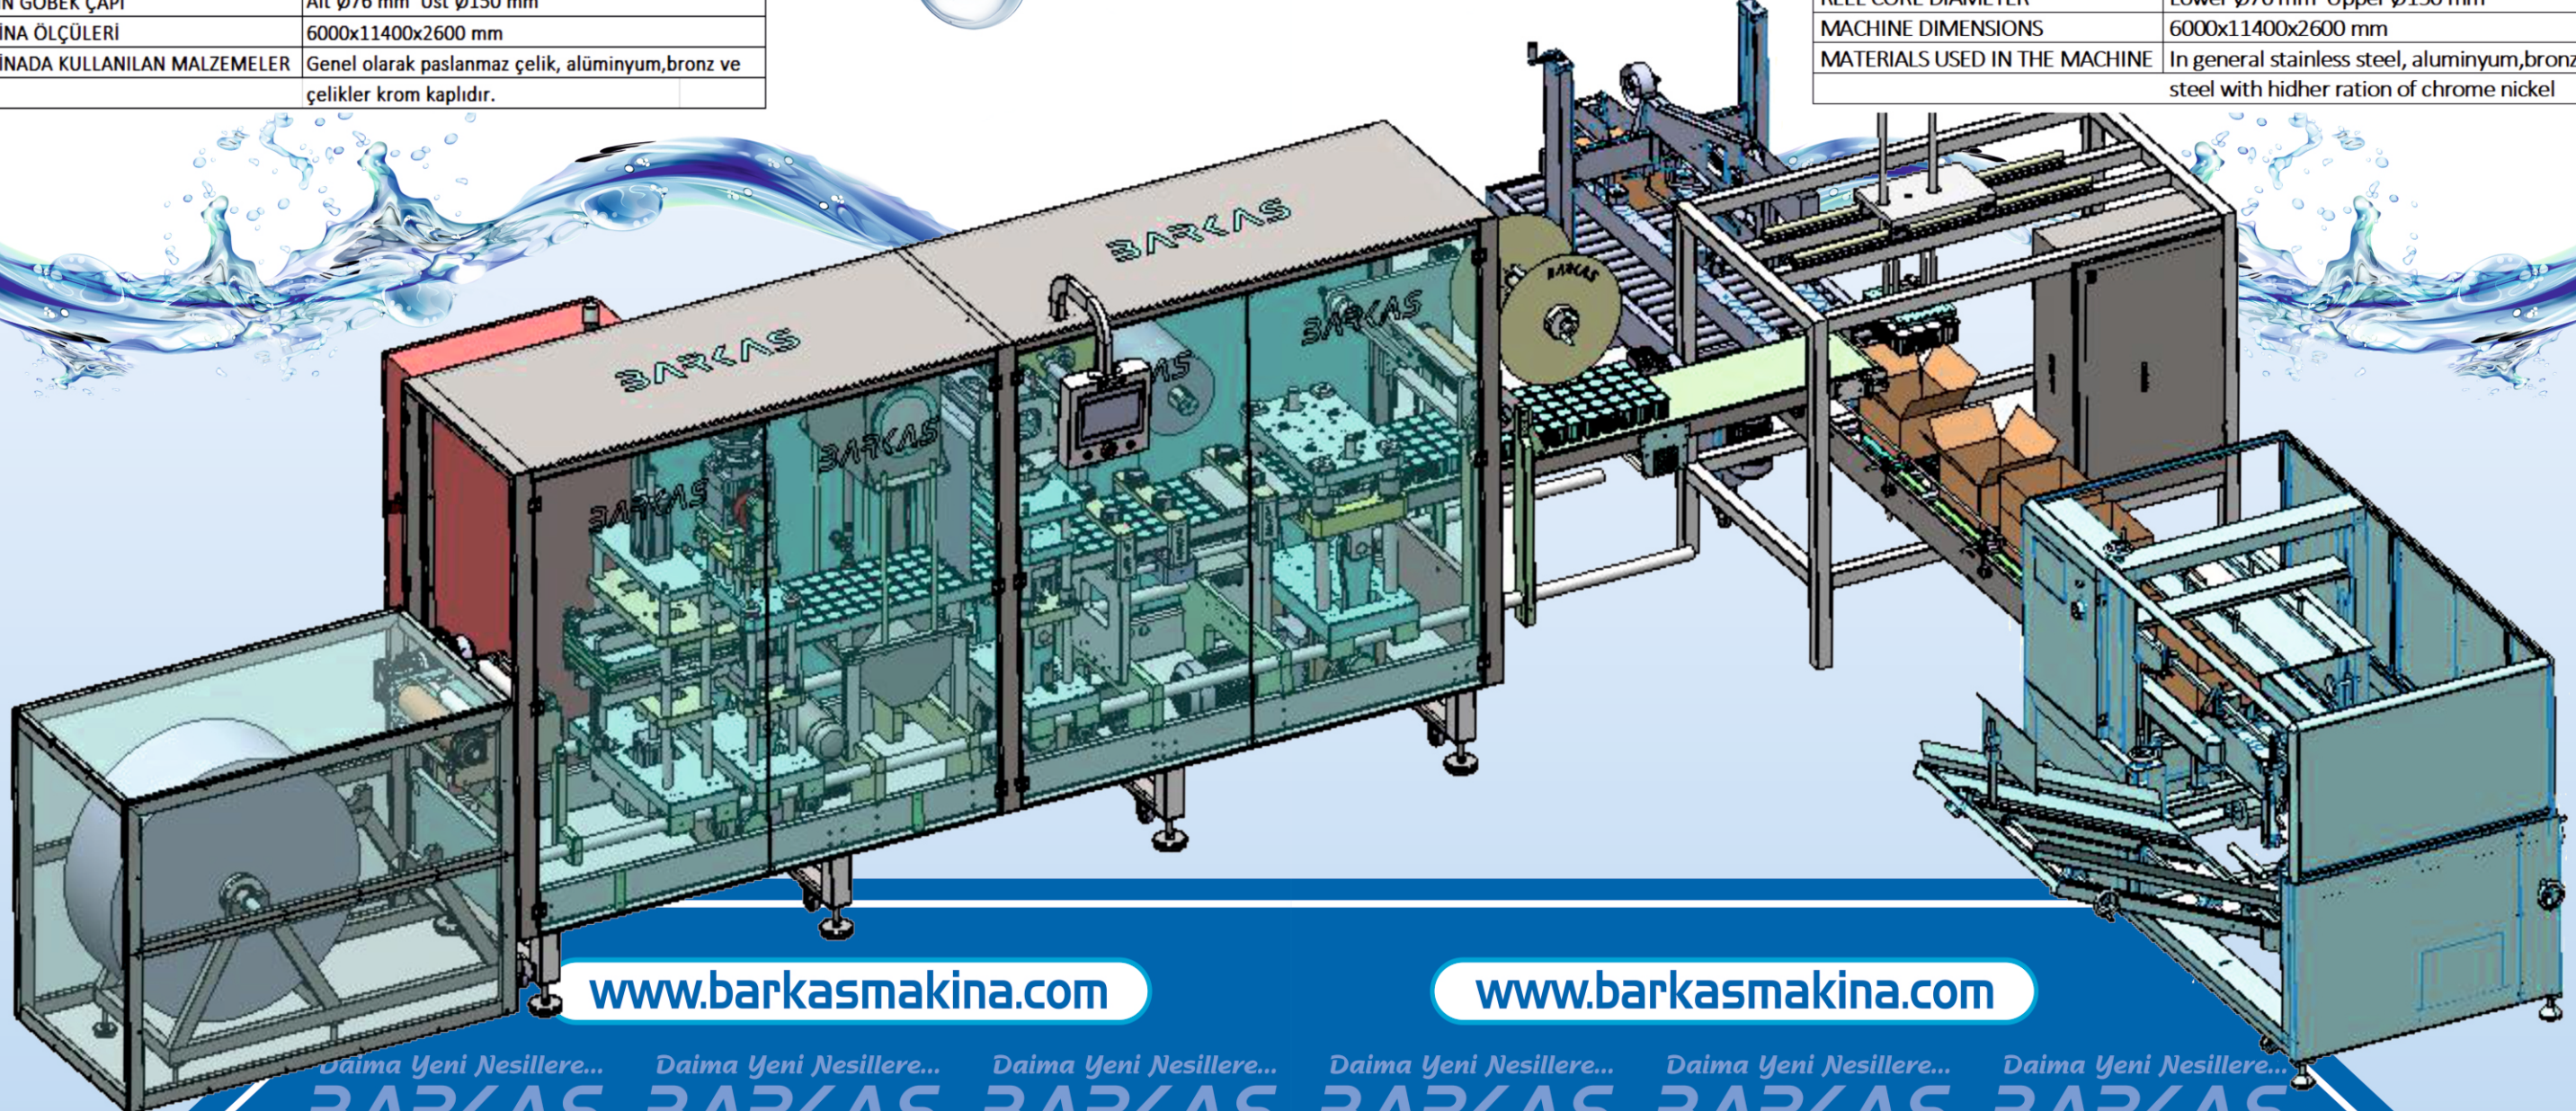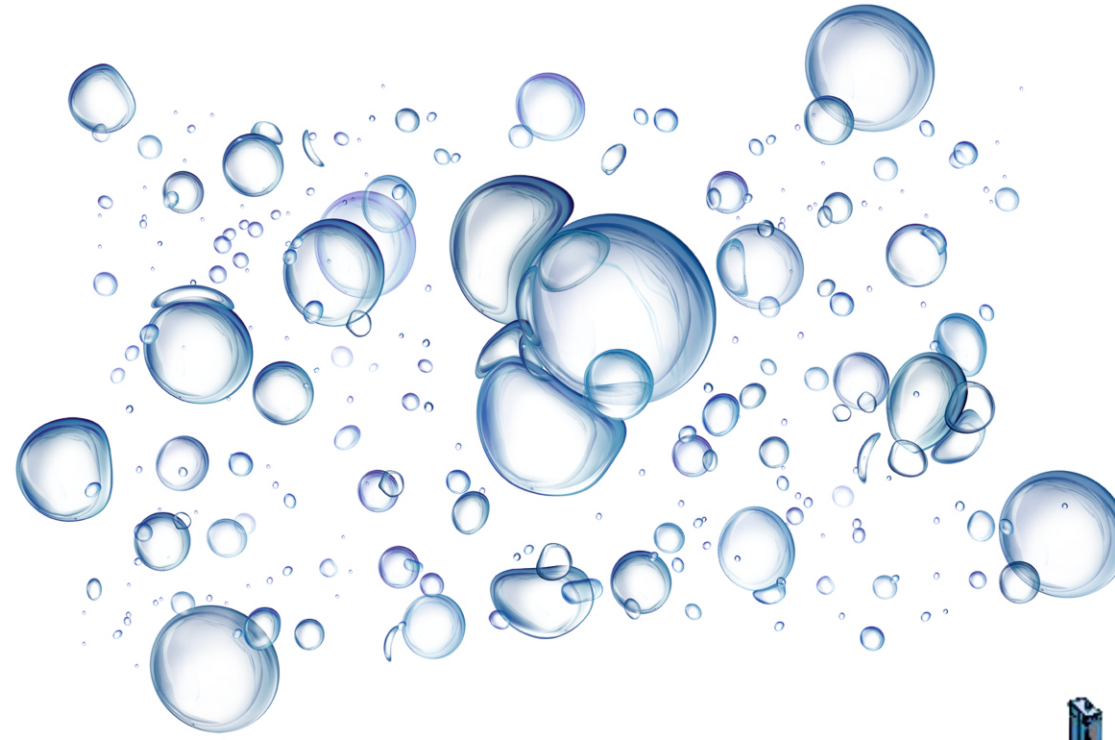

www.barkasmakina.com

www.barkasmakina.com

Daima Yeni Nesillere... Daima Yeni Nesillere... Daima Yeni Nesillere... Daima Yeni Nesillere... Daima Yeni Nesillere... Daima Yeni Nesillere...

BARKAS BARKAS BARKAS BARKAS BARKAS BARKAS